# Choosing your Coping Material

17



## Pool Coping

Pool coping is the material used to finish the top edge of your swimming pool.

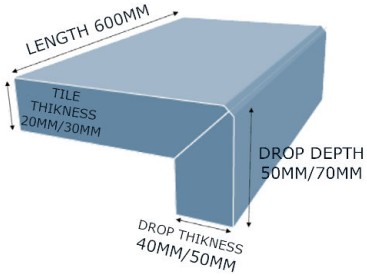


## Requirements

You are to provide the correct size material to suit this nominated coping width and will allow for a 50mm overhang.
For example, a 200mm walkway will need a 250mm bull nose. This slight overhang will provide the right aesthetics for your interior lining to come up the wall and finish underside.

DROP FACE REQUIRES A MINIMUM OF 50mm OVERHANG

**NOTE: It is important to not lay coping over 2 different structures.**

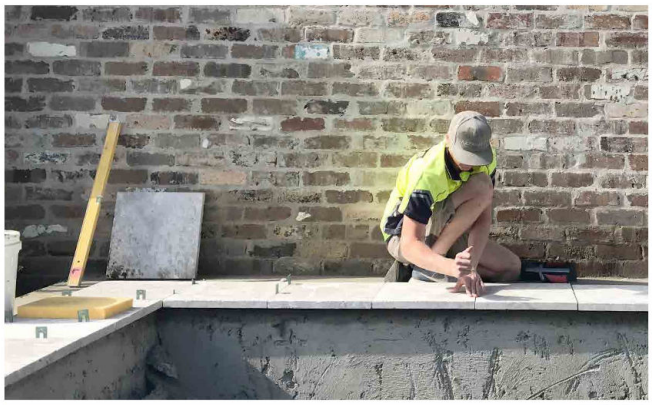

## Bond Beam & Tile Width

The width of bond beam and tile width have to suit each other:

- 200mm bond beam - 250mm coping tile
- 360mm bond beam - 400mm coping tile
- 560mm bond beam - 600mm coping tile
- 860mm bond beam - 600 + 300mm body paver

## Tile Cutting

We don't cut each tile to size by hand.

- The cutting is required by factory when you order your tiles (from supplier)
- Allow for wastage if planning for smaller cuts or specific patterns. Hand cuts required for free-form pool shape so you need to plan for wastage.

## Profile
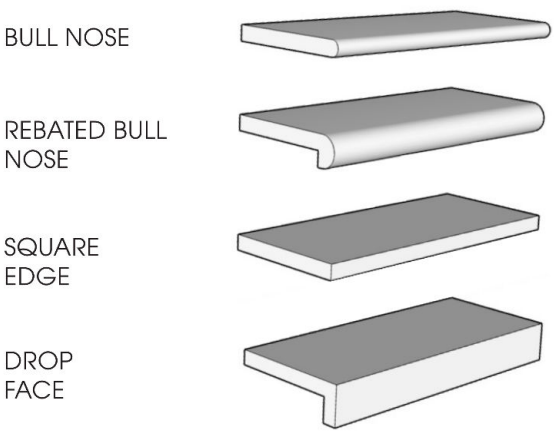
- BULL NOSE OR ROLLED EDGE: Flat and smooth with a rounded edge at the end. Good for free-form pools.
- REBATED BULL NOSE: Flat with a large rounded edge at the end. Good for diving from or for holding onto from inside the pool
- SQUARE EDGE: Flat surface with no sharp edges. Easier edge to get in and out of the pool with
- DROP FACE OR REBATED SQUARE EDGE: This coping runs out flat then drops at a 90-degree angle over the water in an L - shape. Classic and modern look. More decorative and perfect to modern formal pools.
- Must be at least 50mm dropface.